
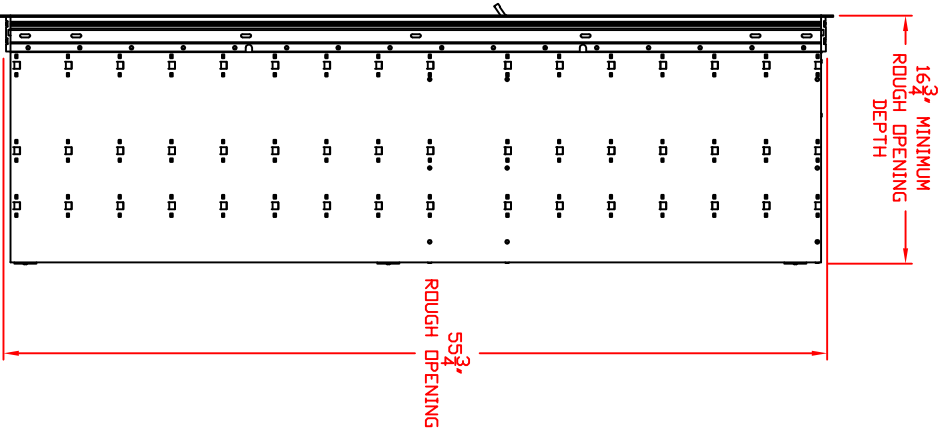
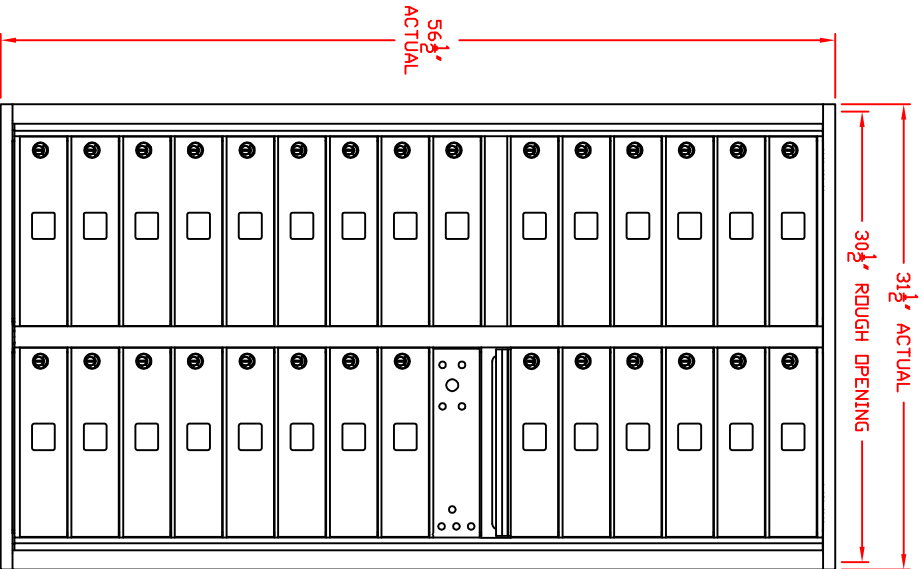


NOTE:
 This unit does not meet the USPS installation specification requirements as shown below. This unit is for private delivery only unless approved and authorized by local postal officials.

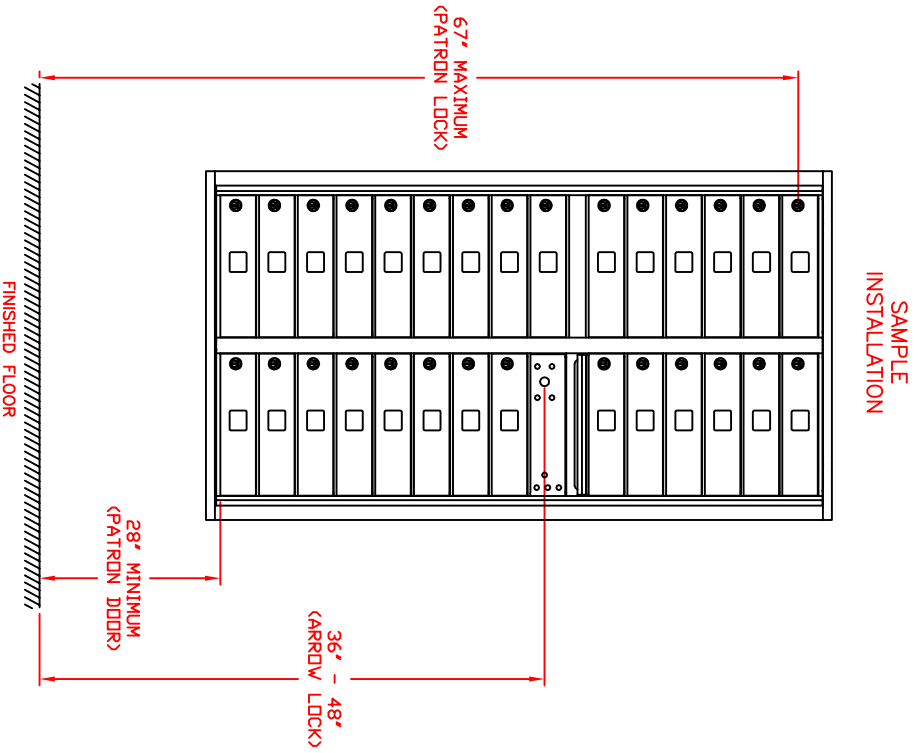

- USPS STD-4C Installation requirements include:
1. No parcel locker may be positioned lower than 15" (interior bottom shelf) from the finished floor.
 2. At least one patron compartment shall be positioned less than 48" from the finished floor.
 3. No patron lock shall be positioned higher than 67" from the finished floor.
 4. No patron compartment shall be positioned lower than 28" (interior bottom shelf) from the finished floor.
 5. The USPS Arrow Lock shall be positioned 36" to 48" above the finished floor.

Postal Products Unlimited, Inc.
 500 W. Oklahoma Ave.
 Milwaukee, WI 53207-2649
 www.postalproducts.com
 (800) 229-4500

**POSTAL PRODUCTS
 UNLIMITED, INC.™**

Product: 4C Horizontal - F Series "FRANKFOR"

Model: N1029417

Date: 12/14/10 Scale: NTS Drawn By: JER Checked By: TR