

NOTE:

and authorized by local postal officials. unit is for private delivery only unless approved specification requirements as shown below. This This unit does not meet the USPS installation

163' MINIMUM ROUGH OPENING T DEPTH

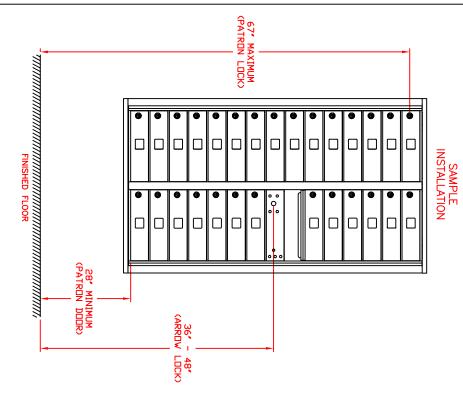

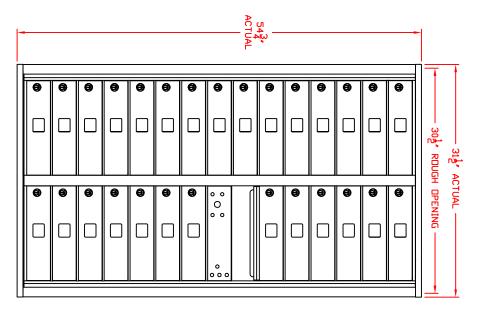

ė ė þ

ė ė ė

ė

ė ė

ė

þ

ROUGH OPENING

- USPS STD-4C Installation requirements include:

 1. No parcel locker may be positioned lower than 15" (interior bottom shelf) from the finished floor.
- 'n finished floor. At least one patron compartment shall be positioned less than 48" from the
- 3. No patron lock shall be positioned higher than 67" from the finished floor.
 4. No patron compartment shall be positioned lower than 28" (interior bottom shelf) from the finished floor.
- The USPS Arrow Lock shall be positioned 36" to 48" above the finished floor.

Postal Products Unlimited, Inc. Milwaukee, WI 53207-2649 www.postalproducts.com 500 W. Oklahoma Ave (800) 229-4500

PRODUCTS

Product: 4C Horizontal - G Series "GREENSBORO"

Model: N1029456

Date: 12/21/10 | Scale: NTS Drawn By: JER Checked By: Ħ