


NOTE:

and authorized by local postal officials. unit is for private delivery only unless approved specification requirements as shown below. This This unit does not meet the USPS installation

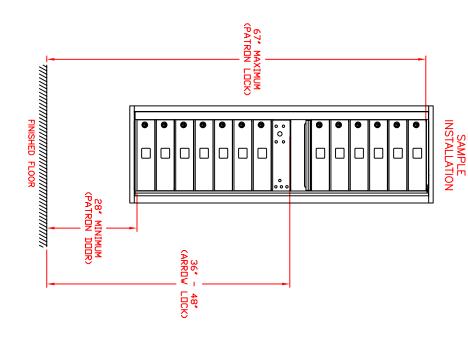

- USPS STD-4C Installation requirements include:
 1. No parcel locker may be positioned lower than 15" (interior bottom shelf) from the finished floor.
- ы finished floor. At least one patron compartment shall be positioned less than 48" from the
- υ, 4.
- shelf) from the finished floor. No patron lock shall be positioned higher than 67" from the finished floor. No patron compartment shall be positioned lower than 28" (interior bottom
- The USPS Arrow Lock shall be positioned 36" to 48" above the finished floor.

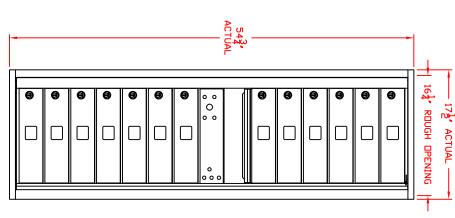

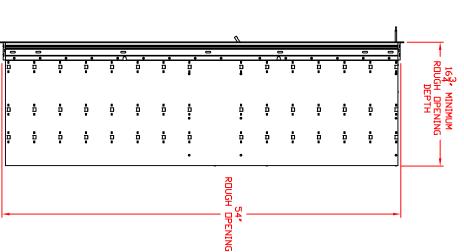

Product: 4C Horizontal - G Series "GREENSBORO"

Model: N1029457

Milwaukee, WI 53207-2649 www postalproducts com

(800) 229-4500

Postal Products Unlimited, Inc.

500 W. Oklahoma Ave.

Date: 12/21/10 Scale: NTS Drawn By: JER

Checked By:

Ħ